Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 192858

WIRELESS AV TRANSMITTER USER MANUAL

MODEL: 15-2400VT, 15-1200VT, 15-1200VH

1. Panel View

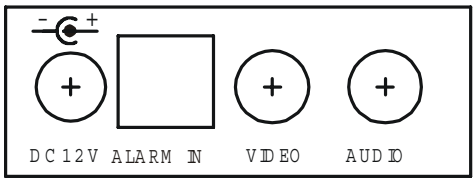

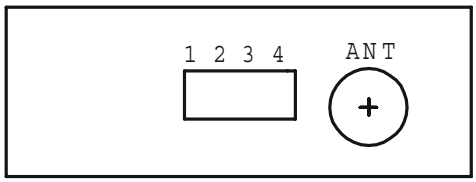

1. DC+12V: Power input DC+12V.
2. ALARM IN: Connect alarm sensor, e.g.: PIR Detector, Magnetic Reed Switch Detector. (15-1200VT, 15-1200VH without the function)
3. VIDEO: Input video signal.
4. AUDIO: Input audio signal.
5. 1 2 3 4: Channel Selection, transmitter select CH 1 and switch of the receiver select “1”, too.(15-2400VT).
   4 3 2 1: Channel Selection, transmitter select CH 1 and switch of the receiver select “1”, too.(15-1200VT, 15-1200VH).
6. ANT: Connect with antenna.

REMARK: When picture have the interference, adjust antenna or change the channel of transmitter.

2. Caution for Installation

2.1 Be careful, never let any water in this equipment.
2.2 If necessary, use a soft cloth moistened with alcohol to wipe off the dust.
2.3 Be extra careful not to shake the unit.
2.4 Avoid places where temperatures exceed 50 ^{o}C or more.
2.5 Avoid places where there is frequent vibrations or shocks.
2.6 When any abnormalities occur, make sure to unplug the unit and contact your local dealer.

3. Packing

3.1 Transmitter	×1
3.2 Antenna	×1
3.3 User manual	×1
3.4 Screws	×4
3.5 Plastic-Conical-Anchor	×4
3.6 Power Adaptor	×1
3.7 AV Cable	×1

4. Specification

CHANNAL		CH1	CH2	CH3	CH4
FREQUENCY	15-1200VT	1080MHz	1120MHz	1160MHz	1200MHz
	15-2400VT	2413MHz	2432MHz	2451MHz	2470MHz
IMPEDANCE		50 Ohms Typical			
POWER		AC/ DC12V Adaptor			
CURRENT		100mA			
OUTPUT POWER		10mW (15-2400VT); 50mW(15-1200VT); 200mW (15-1200VH)			
VIDEO INPUT		1 Vp-p Composite			
AUDIO INPUT		2 Vp-p Max.			
DIMENSIONS		L:115 ㎜	H:23 ㎜	D:80 ㎜	